

22



**This guide was
published in July 2015**

Please check
woodsolutions.com.au/publications
to ensure you have the latest edition

Thermal Performance in Timber-framed Buildings

To be used in conjunction with Guides 23 and 24



WoodSolutions Technical Design Guides

A growing suite of information, technical and training resources, the Guides have been created to support the use of wood in the design and construction of the built environment.

Each title has been written by experts in the field and is the accumulated result of years of experience in working with wood and wood products.

Where required, the text is supported by compliance and example drawings.

Some of the Guide topics include:

- Timber-framed construction
- Building with timber in bushfire-prone areas
- Designing for durability
- Timber finishes
- Stairs, balustrades and handrails
- Timber flooring and decking
- Timber windows and doors
- Fire compliance
- Acoustics
- Thermal performance

More WoodSolutions Resources

The WoodSolutions website provides a comprehensive range of resources for architects, building designers, engineers and other design and construction professionals.

To discover more, please visit
www.woodsolutions.com.au
The website for wood.

*Cover image: Austinmer Beach House,
 Architects: Alexander Symes Architect in association with g+v architecture
 Photographer: Nicholas Watt*



WoodSolutions is an industry initiative designed to provide independent, non-proprietary information about timber and wood products to professionals and companies involved in building design and construction.

WoodSolutions is resourced by Forest and Wood Products Australia (FWPA – www.fwpa.com.au). It is a collaborative effort between FWPA members and levy payers, supported by industry bodies and technical associations.

This work is supported by funding provided to FWPA by the Commonwealth Government.

ISBN 978-1-925213-02-7

Acknowledgments

This document brings together key considerations from:

Guide 23: Using thermal mass in timber-framed buildings in Australia: Effective use of thermal mass for increased comfort and energy efficiency by Ben Slee and Dr Richard Hyde, University of Sydney.

Guide 24: Thermal performance for timber-framed residential construction: Building comfortable and energy-efficient timber houses, by Dr Mark Dewsbury and Associate Professor Gregory Nolan, University of Tasmania.

Compiled by Scott Willey as a guide to the above publications.

Author: Scott Willey

First published: July 2015

**© 2015 Forest and Wood Products Australia Limited.
 All rights reserved.**

These materials are published under the brand WoodSolutions by FWPA.

IMPORTANT NOTICE

While all care has been taken to ensure the accuracy of the information contained in this publication, Forest and Wood Products Australia Limited (FWPA) and WoodSolutions Australia and all persons associated with them as well as any other contributors make no representations or give any warranty regarding the use, suitability, validity, accuracy, completeness, currency or reliability of the information, including any opinion or advice, contained in this publication. To the maximum extent permitted by law, FWPA disclaims all warranties of any kind, whether express or implied, including but not limited to any warranty that the information is up-to-date, complete, true, legally compliant, accurate, non-misleading or suitable.

To the maximum extent permitted by law, FWPA excludes all liability in contract, tort (including negligence), or otherwise for any injury, loss or damage whatsoever (whether direct, indirect, special or consequential) arising out of or in connection with use or reliance on this publication (and any information, opinions or advice therein) and whether caused by any errors, defects, omissions or misrepresentations in this publication. Individual requirements may vary from those discussed in this publication and you are advised to check with State authorities to ensure building compliance as well as make your own professional assessment of the relevant applicable laws and Standards.

The work is copyright and protected under the terms of the Copyright Act 1968 (Cwth). All material may be reproduced in whole or in part, provided that it is not sold or used for commercial benefit and its source (Forest and Wood Products Australia Limited) is acknowledged and the above disclaimer is included. Reproduction or copying for other purposes, which is strictly reserved only for the owner or licensee of copyright under the Copyright Act, is prohibited without the prior written consent of FWPA.

WoodSolutions Australia is a registered business division of Forest and Wood Products Australia Limited.

Introduction

If thermal mass is used correctly within housing it can moderate daily temperature fluctuations, leading to more comfortable interiors, and reduce the energy used for artificial heating or cooling. If thermal mass is used incorrectly, the opposite occurs.

This Guide gives a simple step-by-step overview of housing design for greater thermal comfort.

The design considerations listed are covered in greater detail in two FWPA publications which focus specifically on the thermal performance of timber framed houses:

Guide 23: Using thermal mass in timber-framed buildings (see page 10)

Guide 24: Thermal performance for timber-framed residential construction (see page 11)



References to these and other useful resources are listed at the base of each design consideration.

It is worth remembering that a house built today might still be providing shelter and comfort in more than 60 years time. Thoughtful design and construction offer benefits over the life of a house:

- The earlier in the design phase decisions are made to improve comfort, the more cost effective they can be.
- Exceeding minimum 'star' ratings offers greater comfort for residents.
- Greater comfort means less energy is needed for heating and cooling.
- Careful detailing can avoid maintenance problems with moisture build-up.

Refer to Technical Design Guides under the Resources section of the WoodSolutions website (www.woodsolutions.com.au) for the above publications..

Timber and thermal comfort in housing

Most existing houses in Australia are timber-framed and new homes continue this tradition. Many modern homes perceived to be 'brick' houses are actually timber-framed houses with bricks used only as a cladding.

Modern construction methods mean an increasing number of low-rise apartment buildings, traditionally constructed out of masonry for fire-resistance, are now being built with timber frames as well.

Designing for timber thermally

As construction technology has developed standards of fire-resistance, acoustic separation and thermal comfort in timber buildings have improved. This guide provides design and construction knowledge on how to achieve superior thermal comfort and better thermal performance which delivers:

- more comfort for residents
- less energy use for heating and cooling
- less greenhouse gas emissions

Decreasing emissions - increasing comfort

Timber-framed houses tend to be more responsive to heating and cooling than buildings with higher thermal mass. Keeping occupants comfortable is achieved by moderating internal temperatures to avoid extremes. Comfort and energy efficiency can be maximised by a focus on avoiding unwanted heat loss or gain through the building envelope. This Guide gives solutions for achieving this with:

- fewer greenhouse gas emissions
- well insulated building envelope
- avoiding air infiltration



High performing social housing

Hopkins Street Affordable Housing Project is a multi-residential timber framed building with a 7.3-8.1 Star Rating (Source: Xsquared Architects, Photographer: Ray Joyce)

House design and orientation

1 Designing for Residents' Needs

Successful house design works best when it is tailored for its residents, which is why thermal comfort is important.

When a home is designed to pair comfort to occupant's lifestyles they will want to use less heating and cooling and thus use less energy.

For example, a house designed for retired residents might have a greater focus on daytime living. A younger working family's house design is more likely to focus on comfort in the evening.

If the future residents are not known then design should focus on the needs of the most likely residents.

More information:

- *Your Home*: www.yourhome.gov.au/you-begin/preliminary-research

2 Designing for Climate

To increase both comfort and energy efficiency, a house design should work with the local climate rather than against it.

Seasonal temperature and humidity variations are strong drivers of climate-responsive design.

Daily temperature variation also need to be considered. For example, hot, dry climates often have nights that are significantly cooler than days. Houses can respond by closing down during the heat of the day and opening up in the cool at night.

Alternatively, responsive design in a hot, humid climate opens in the day to take advantage of cooling breezes.

Refer to the National Construction Code for the specific climate zone for your project.

More information:

- *Guide 23: Section 6, Thermal Mass in Australian Climates*
- *Guide 24: Section 3.2, Designing for Climate, 3.4 Considerations for Specific Climates*
- *Your Home*: www.yourhome.gov.au/passive-design/design-climate
- *Bureau of Meteorology*: www.bom.gov.au/climate

3 Orientation - Working with the Sun

For most Australian climates, houses should orientate to the north to maximise daylight, especially in winter.

In cooler climates, capturing the warmth of the winter sun is a priority.

In hot climates, orienting toward cooling breezes and avoiding the sun all year round can determine the best orientation.

It may be that the cooling breezes in warmer months come from a different direction to winter sun.

Views, privacy, road noise and bushfire risk are just some of the other considerations that need to be considered when deciding which direction to face a house and how open it should be.

More information:

- *Guide 24: Section 3.3, Designing for Sun, Section 4.1 Planning and Site Selection*
- *Your Home*: www.yourhome.gov.au/passive-design/orientation



Planning and form

4 Room Zoning

Beyond the other functional needs in planning a house, dividing rooms by occupation type can determine their orientation priority.

Morning sun can be welcome in eastern bedrooms, particularly in colder climates. Northern living areas allow residents to take advantage of the best daylight and the sun's warmth in winter.

Non-occupied spaces such as garages or utility rooms can be placed to the west to block undesirable afternoon summer sun.

Zoning rooms together with similar heating and cooling requirements aids efficiency.

Adding doors to halls and between living areas can prevent unwanted loss of heated or cooled air.

More information:

- *Guide 24: Section 3.3, Designing for Sun*
- *Guide 24: Section 4, Planning Strategies*
- *Your Home: www.yourhome.gov.au/passive-design/orientation*

5 Controlling Surface Area with Form

As the floors, external walls and roof all form part of the building envelope, these surfaces form the primary line of control for heat entering and leaving a building.

The greater the surface area – the greater the potential heat transfer.

Some climates warrant elongated, more lineal floor plans designed to catch warming sun or cooling breezes.

Compact house forms minimise the area of the exposed envelope to external temperatures, and are more appropriate for extreme climates.

More information:

- *Guide 24: Section 4.2, Site Master Planning*
- *Guide 24: Section 5, Envelope Strategies*



Controlling heat gain & loss

6 Capturing the Sun - Glazing Design

Glazed windows and doors allow access to views and natural light and, if openable, allow ventilation as well. Windows become 'thermal holes' in the envelope and their design needs careful consideration.

Direct sun admitted to a building can quickly cause overheating. The area of glazing requires careful consideration of the amount of solar warmth required for a particular orientation.

In most climates, western facing windows admit too much heat in summer, and should be limited.

The poor insulative property of glass leads to high heat loss in cooler weather. In cooler climates, minimise southern glazing, as it loses winter warmth while never gaining warming sun.

More information:

- **Guide 23: Section 4.2.5 Window Size**
- **Guide 24: Section 5.6, Windows**
- **Your Home:** www.yourhome.gov.au/passive-design/passive-solar-heating, www.yourhome.gov.au/passive-design/glazing

7 Capturing breezes - Ventilation

Any house needs constant ventilation to exhaust odours and provide fresh air for occupants, though the amount needed for this is small.

When ventilating for cooling, it is important that cross ventilation be well designed to maximise airflow, even in calm conditions. Narrow floor plans allow for greater cross ventilation.

In cooler weather, unwanted air movement equals unwanted loss of heat. In summer, the reverse is true for air-conditioned spaces.

Well-designed ventilation should consider wet weather, flying insects, wind gusts, etc. If security is not considered in window design, residents are less likely to be able to leave windows open when needed, including overnight.

More information:

- **Guide 23: Section 4.2.4, Controlled Ventilation**
- **Guide 24: Section 4.2.7, Natural Ventilation**
- **Your Home:** www.yourhome.gov.au/passive-design/passive-cooling

8 Controlling Solar Gain with Shading

The sun's heat can be as much as that from a 1000 watt single-bar electric heater on every square metre of the building it contacts. Roof overhangs limit the amount of heat reaching external walls. The hotter the climate, the more important this is.

As winter sun comes at a lower altitude to summer sun, well-designed roof overhangs and awnings can allow winter sun while providing shade in the warmer months. Fortunately, in the higher latitudes where winter sun is more important, this effect is more pronounced. Verandahs, pergolas, trellises and external blinds can all be used to control sun while also adding visual interest.

More information:

- **Guide 24: Section 5.7, Eaves and external shading**
- **Your Home:** www.yourhome.gov.au/passive-design/shading

- Your Home: Orientation: www.yourhome.gov.au/passive-design/orientation

Penetration design

9 Controlling Heat Conduction with Insulation

As the building envelope is the line at which heat is lost or gained in a building, the ability to control heat movement through it is critical.

Insulation is valued for its ability to resist heat flow, and thus a higher 'R' value indicates greater insulative ability. Insulation products work to slow heat conduction, and reflect radiant heat.

Insulating roofs, ceilings, walls and under floors has become common practice. It is important however, that the insulation provided is detailed and installed correctly to maximise its value. Beware thermal short-circuiting known as 'thermal bridging'.

Double glazed windows with 'thermally broken' frames prevent heat loss in cold climates, and heat gain for air-conditioned buildings in hot climates.

More information:

- *Guide 24: Section 5.4, Thermal Insulation*
- *Your Home: www.yourhome.gov.au/passive-design/sealing-your-home*

10 Controlling Air Leakage

Uncontrolled air movement brings unwanted heat movement. Creating more airtight construction will give greater comfort and greater energy efficiency – leaving ventilation control to the operation of windows and doors by occupants.

Using sarking in roofs and quality building wrapping over walls inhibits the flow of air through the building fabric.

It is important the building wrap is continuous and that wrap joints and penetrations are well lapped and sealed with tape.

The underside of raised timber floors can also be wrapped, although it is important to ensure timber members are able to breathe, and no moisture is trapped.

More information:

- *Guide 24: Section 5.3, Air-tightness*
- *Your Home: www.yourhome.gov.au/passive-design/shading*

11 Avoiding Moisture Build-up

Air inside and outside buildings contains moisture. Condensation occurs when moist air hits cool surfaces.



In cool weather, when air passing outward from the building interior contacts the back of the external cladding, condensation can form within the building fabric.

Similarly, condensation can form when outside air contacts the back of the internal cladding of an air-conditioned building.

To avoid deterioration of building materials and potential health problems, houses should be detailed and wrapped well to avoid moisture vapour movement through the building envelope. Construction should also allow for any trapped condensation to evaporate.

More information:

- *Guide 24: Section 5.1, Structural moisture control*

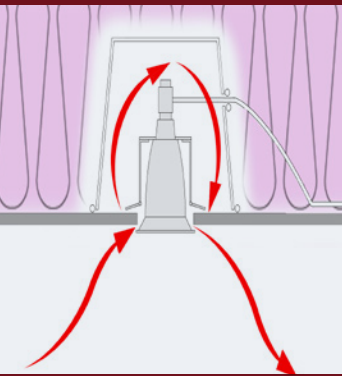

Adjusting mass and testing

12 Moderating Temperatures with Thermal Mass

Solid and heavy materials often have an ability to store and release heat. This ability can be utilised to even out daily temperature extremes. This ability is commonly known as 'thermal mass'.

Utilising well-designed thermal mass can provide more comfortable interiors. However, if not designed well, too much mass can create interiors that are hard to keep comfortable.

For any climate there is a point at which adding thermal mass provides little or no benefit. The location of the mass within a room is also important. As heat rises, mass in ceilings can be used to absorb heat for optimal cooling and when used for heating, solar-heated mass in the floor is best.

More information:

- *Guide 23: Section 4, Placing Thermal Mass*
- *Guide 24: Section 5.8, Thermal Mass and Thermal Capacity*
- *Your Home: www.yourhome.gov.au/passive-design/thermal-mass*

13 Testing the Design

Computer modelling thermal performance allows building designers to test which design changes will be the most effective for enhancing thermal comfort. Allowing for additional experimentation with the building design and testing before the design is locked-in will produce the most effective results.

An optimal design will save money on construction and energy usage.

More information:

- *Guide 24: Section 2.3 Thermal simulation*
- *Nathers: www.nathers.gov.au/accredited-software/how-nathers-software-works/star-ratingscale*

14 Informed Occupants

Like anyone buying a new appliance, new home owners appreciate understanding what they have bought, and how it is designed to operate.

Good passive design and a high energy star rating on a house can be unwittingly over-ridden by a 'one-star occupant'.

Many home owners will presume they will need air-conditioning or ducted heating systems, based on their previous living experiences. As thermal performance standards increase, it can be valuable for future occupants to be made aware of the performance they can expect from their new home, before they commit to heating and cooling systems that are oversized, or not needed at all.

More information:

- *www.yourhome.gov.au/passive-design*




Guide 23 - Using Thermal Mass in Timber-framed Buildings

Effective use of thermal mass for increased comfort and energy efficiency

Traditional cultures have long understood the value of thermal mass in buildings for moderating internal temperatures. However if used in the wrong proportions, too much thermal mass can actually decrease comfort.

Modern Australian homes tend to use the same lighter-weight, brick veneer and timber construction across a wide variety of climatic conditions, yet with remarkably little design variation. In this Guide the authors explain thermal comfort is not only dependant on the proportion of thermal mass but also the size and location of glazing in a building.

Thermal mass can be used to carry the warmth of the day into cool nights, or inversely - the cool of the evening into hot days. A series of simulations demonstrate that the height mass is placed within a space will vary its value in enhancing heating or cooling.

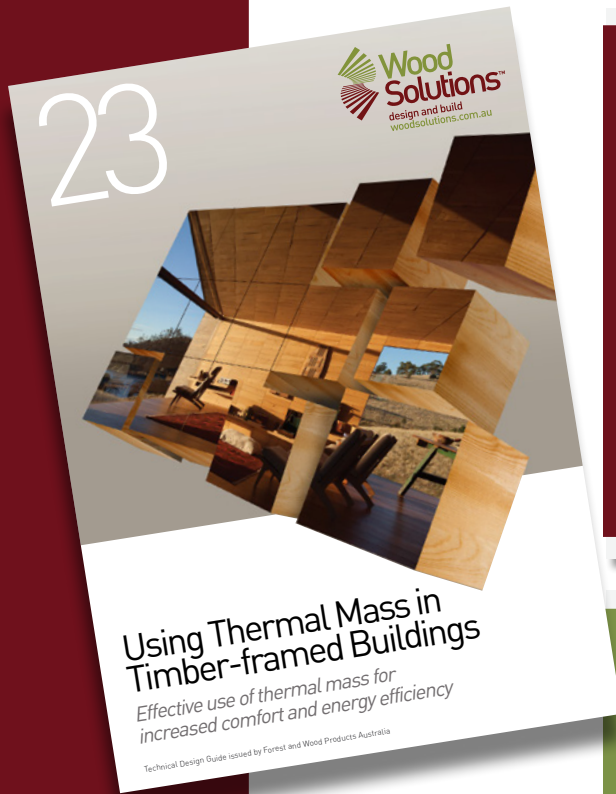

6 Thermal Mass in Australian Climates

Australia is an enormous country straddling a quarter of the globe, north to south. The country contains a vast range of climates. How thermal mass should be used in a particular building changes, depending on the local climate, and in the building must be designed in response to that climate.

Australia's major cities are located along the coast. The ocean adjacent to each city stays at a fairly constant temperature through the year, which helps moderate the climate on the coast. Inland climates benefit from cooling sea breezes in summer and warmer winters, compared to inland communities. Inland deserts have the opposite effect, creating extremes of hot and cold in summer and winter.

Location	Embodied CO ₂ (kg)	Sequestered CO ₂ (kg)
A. Limit	0.0 kg/m ²	4.68 kg
B. Floor	80.0 kg/m ²	6.04 kg
C. Ceiling	80.0 kg/m ²	6.04 kg
D. Walls	10.0 kg/m ²	4.68 kg
E. Floor & Ceiling	160.0 kg/m ²	9.32 kg
F. Floor & Walls	90.0 kg/m ²	8.86 kg
G. Walls & Ceiling	190.0 kg/m ²	9.32 kg
H. All	270.0 kg/m ²	10.88 kg

Figure 9: Legend for location of mass in heating.

The above mass is an approximate estimate with the shaded element representing either the ceiling, walls or floor. When shaded, the modelled element has the thermal mass of a 100mm concrete slab. The remaining structure is the equivalent of conventional lightweight, timber-framed construction.

#22 - Using thermal mass in timber-framed buildings Page 16

6.1 Cooler Climates - Hobart, Melbourne and Canberra

In the cooler climates of Hobart, Melbourne and Canberra, heating is responsible for the majority of the space-conditioning energy consumption. Keeping cool has low priorities, but when considered in the context of a whole year, the cooling energy requirement is for a short period.

Thermal mass can make a useful difference to the energy efficiency of a building. It is important to understand that thermal mass needs to be heated up whether or not it is hot and sunny outside. For example, an all glass design in a high-mass house that is not cold. If it is not hot and sunny outside, it is not hot and sunny inside. It is not hot and sunny inside, it is not hot and sunny outside. A small amount of mass is not enough to make a difference to the energy efficiency of a building. A small amount of mass is not enough to make a difference to the energy efficiency of a building. A small amount of mass is not enough to make a difference to the energy efficiency of a building.

Key observations:

- Construction - Lightweight construction improves performance in winter.
- Winter warmth - Mass makes little difference to the energy efficiency of the space and can reduce efficiency due to winter heating loads.
- Summer cool - Some mass is helpful.
- Windows - The size of the north-facing direct-gain window is the primary determinant of energy efficiency. The larger the window, the less efficient the space.
- Shade - More shading or smaller windows will improve efficiency.

Figure 10: Predicted annual operational energy consumption for Melbourne.

#23 - Using thermal mass in timber-framed buildings Page 17

4.2.1 Summer Cooling

Figure 2: Summer cooling.

When thermal mass is used to keep a space cool in summer, the thermal mass is absorbing thermal energy from the air primarily by conduction. Warm air rises above cooler air (convection) and so the warmer air is always found near the ceiling, the coolest air is near the floor.

The thermal mass should be placed where the warmest air is so it absorbs the most amount of energy most effectively, such as on the ceiling or in the walls. Placing mass on the floor will only help keep the coolest air cool.

When this strategy is employed, the thermal mass is often described as providing or storing 'coolth'.

4.2.2 Winter Warming

Figure 4: Winter warming.

When thermal mass is used to help keep a space warm in winter, the mass is intended to absorb thermal energy from the sun. The sun shines down and so the thermal mass needs to be on the floor where the sun can shine on it.

This is called a 'direct gain' or 'passive solar' system.

The thermal mass releases the thermal energy slowly through conduction (heating the air) and radiation, particularly during the cooler part of the afternoon and the evening.

If the climate is cloudy in winter or the days are shorter, there will not be enough sun to make this strategy effective. The thermal mass will need to be kept warm by additional auxiliary heating energy. When this strategy is employed, the thermal mass is often described as providing or storing warmth.

#22 - Using thermal mass in timber-framed buildings Page 11

4.2.3 Thermal Mass and Ventilation

When thermal mass is used to absorb excess thermal energy to keep a space cool the mass must be allowed to cool down again so that it has the capacity to absorb more thermal energy the next day. In a passive system this is done by ventilating the space with cool evening and night breezes, occasionally helped by some mechanical ventilation. The strategy is often called night purging.

For the strategy to be effective, there needs to be a difference between the maximum and minimum outside air temperature (diurnal range). There are various options on how big the difference needs to be. For instance, Shaver et al. suggest a minimum of 6°C and Gosses suggests 10°C.

Openings should be on opposite sides of the room to encourage ventilation (cross ventilation), or a roof vent can be used. The most effective air speed for cooling a room is between 1.5-2 metres per second. The air flow is less energy above and below these speeds.

4.2.4 Controlled Ventilation

The strategy of night ventilation, sometimes called night flushing, relies on ventilation being controlled - as does air control. Control means that the occupant can choose when - and when not - to ventilate. This means minimising uncontrolled infiltration through gaps around windows, etc, so that when the air outside is acceptably warm or cool it is prevented from entering the building. The standard 10 mm tolerance gap around a 1 m x 1 m window frame is equivalent to a hole in the wall of 200 mm x 200 mm. (A weather board is not an air seal).

Any tight construction and controlled ventilation allows the occupant to ventilate when it is useful for improving comfort.

4.2.5 Window Size

Window size is important in determining the energy efficiency of a space. In all Australian climates, window size has a greater influence on the energy efficiency of a space than the quantity of thermal mass.



Windows - even double-glazed - are relatively poor insulators, and can allow thermal energy to escape from a space and direct sunlight and associated large heat gains to affect the space.

The desired balance between the size of the window and the quantity of thermal mass is dependent on the local climate. Other factors will also influence the size and proportion of the window in a space, such as the orientation, floor plan and shading.

#23 - Using thermal mass in timber-framed buildings Page 12

Building comfortable and energy-efficient timber houses

The authors use the modelled thermal performance of two typical project homes to contrast how minor design variations give significant gains in energy efficiency - especially when customised to climate.

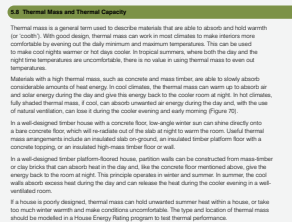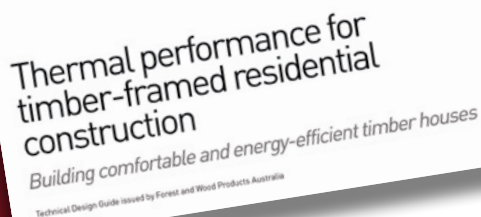



Discover more ways to build your knowledge of wood

If you need technical information or inspiration on designing and building with wood, you'll find WoodSolutions has the answers. From technical design and engineering advice to inspiring projects and CPD linked activities, WoodSolutions has a wide range of resources and professional seminars.

www.woodsolutions.com.au

Your central resource for news about all WoodSolutions activities and access to more than three thousand pages of online information and downloadable publications.

Technical Publications

A suite of informative, technical and training guides and handbooks that support the use of wood in residential and commercial buildings.

WoodSolutions Tutorials

A range of practical and inspirational topics to educate and inform design and construction professionals. These free, CPD related, presentations can be delivered at your workplace at a time that suits you.

Seminars and Events

From one day seminars featuring presentations from leading international and Australian speakers to international tours of landmark wood projects, WoodSolutions offer a range of professional development activities.

What is WoodSolutions?

Developed by the Australian forest and wood products industry for design and building professionals, WoodSolutions is a non-proprietary source of information from industry bodies, manufacturers and suppliers.